


Spacer for surface mounting LED

Part No.: LJ series


- This spacer is used for increasing the height of an LED for surface mounting.
- This is used for adjusting the height of a panel, etc.
- After automatically mounting the spacer and carrying out reflow, please perform manual soldering of an LED for surface mounting.
- Material Resin part: Liquid crystal polymer white (UL94V-0)
Metal part: Phosphor bronze
- Finish: Gold plating over nickel base
- Operating temperature range: - 40 to + 100°C
- Adaptive LED: 3.2 × 1.6 size



Recommended land information



Example of usage

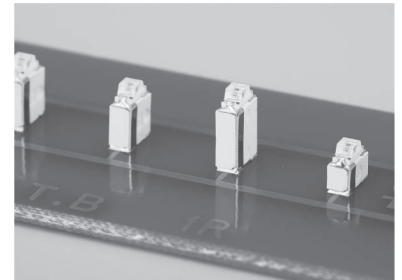


Part No.

Part No.	H	Package
LJ-2	2	Reel (600pcs/reel)
LJ-2.5	2.5	Reel (600pcs/reel)
LJ-3	3	Reel (500pcs/reel)
LJ-3.5	3.5	Reel (500pcs/reel)
LJ-4	4	Reel (400pcs/reel)
LJ-4.5	4.5	Reel (400pcs/reel)
LJ-5	5	Reel (350pcs/reel)
LJ-5.5	5.5	Reel (350pcs/reel)
LJ-6	6	Reel (300pcs/reel)
LJ-6.5	6.5	Reel (300pcs/reel)
LJ-7	7	Reel (250pcs/reel)
LJ-7.5	7.5	Reel (250pcs/reel)
LJ-8	8	Reel (200pcs/reel)

Instructions for use

- Please fix with an adhesive when it inclines during reflow.

Dimension

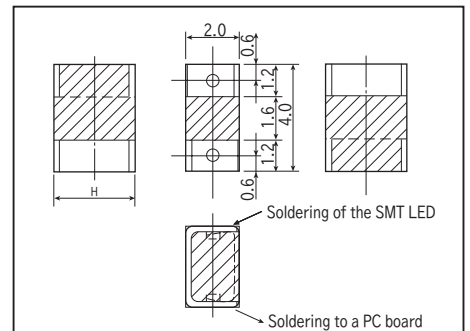

- To purchase bulk products

Part No.: LJ- □ -B (100pcs/pack)

LJ-2 to LJ-3.5

Dimension of the reel

Dimension of the tape

Part No.	H
LJ-2	2.8
2.5	2.8
3	3.8
3.5	3.8

* The metal part can be set in any direction.

LJ-4 to LJ-8

Dimension of the reel

Dimension of the tape

Part No.	H	K
LJ-4	4.8	3.4
4.5	4.8	3.4
5	5.8	3.9
5.5	5.8	3.9
6	6.8	4.4
6.5	6.8	4.4
7	7.8	4.9
7.5	7.8	4.9
8	8.3	5.2

* The metal part can be set in any direction.