



**For two-tiered installation (fixed type, two-row type) (Pitch: 2.54mm)**

**MLW series (10pcs/pack)**

- This is used for mounting PC boards by two-tiered installation.
- This is soldered and fixed on the both sides.
- The pitch is 2.54 mm and the maximum number of connection is 20P.
- Material Resin part: PBT black (UL94V-0)  
Pin part: Brass
- Finish: Gold plating over nickel base
- Rated current: 4A
- Insulation resistance: 500M Ω or over
- Withstand voltage: 1000V AC, DC per minute
- Operating temperature range: - 40 to + 125°C
- Printed board fitting hole diameter: φ 0.9

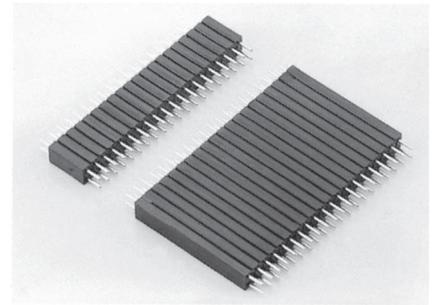


■ Example of usage

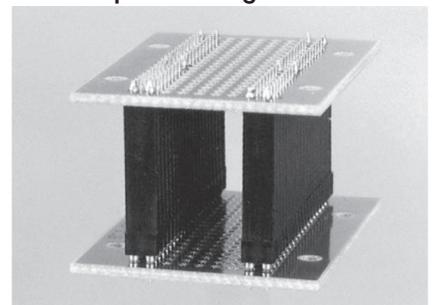

■ Part No.

Part No.	H
MLW-1.2	1.2
MLW-2	2
MLW-3	3
MLW-4	4
MLW-5	5
MLW-6	6
MLW-7	7
MLW-8	8
MLW-9	9
MLW-10	10
MLW-12.5	12.5
MLW-15	15
MLW-17.5	17.5
MLW-20	20
MLW-25	25
MLW-30	30
MLW-45	45
MLW-50	50

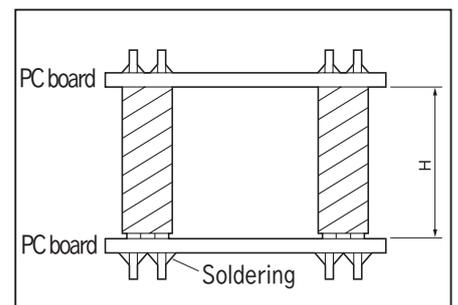

■ How to order:

MLW-10-15PW



Please fill in the number of poles on one side.  
(Maximum number: 20PW)

(If the number is not specified, we will deliver the part of the maximum number of connection.)

■ Dimension

