


Jumper socket (Pitch: 2 mm)

Part No.: **JS-2** (100pcs/pack)


- By combining with WC-20-3.2, WCW-20-3.2 , WCA series or HWC-2P-G switching function is available.
- Material Contact part: Phosphor bronze
Resin part: LCP black (UL94V-0)
- Finish Contact part: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 125V AC, DC
- Contact resistance: 20m Ω or less
- Adaptive male pin diameter: $\phi 0.5$, P = 2.0
- Insertion / Removal forces: 150g or over
- Operating temperature range: - 40 to + 125°C

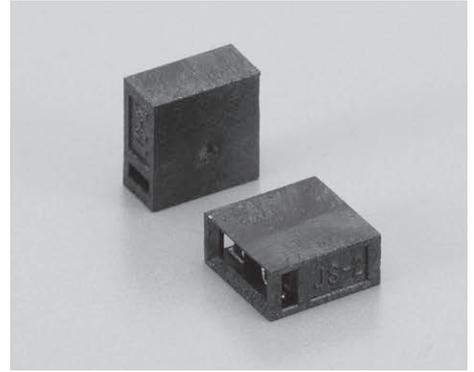


■ **How to order:**

JS-2

■ **Example of usage**

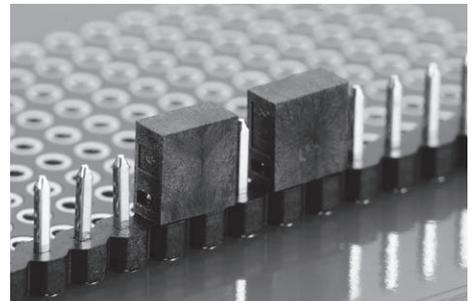

Combination with WC-20-3.2

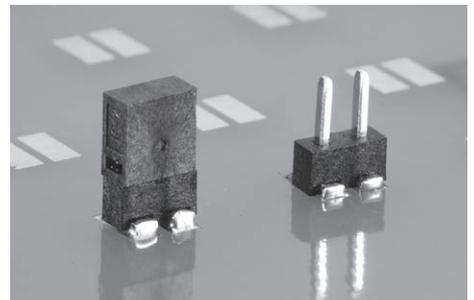

Combination with HWC-2P-G

