




Terminal for fixing PC boards in parallel

BT series (100 pcs/pack)

- This terminal can fix two PC boards in parallel.
- Please fit it to the two PC boards and solder.
- This is adaptive for the PC board with the thickness of t1.0 and t1.6.
- Material: Phosphor bronze
- Finish: Tin plating over nickel base
- Rated current: 30A

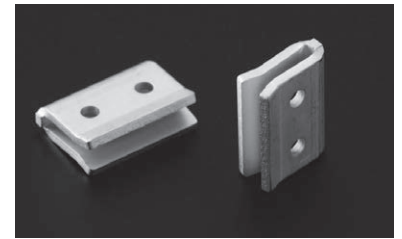



■ Example of usage

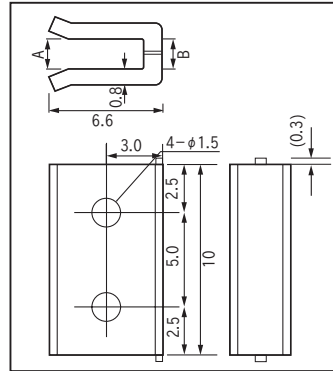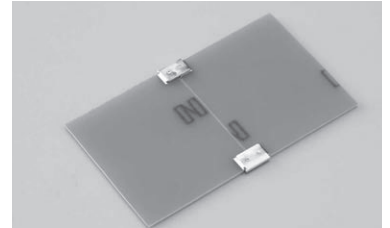

■ Part No.

Part No.	A	B	Adaptive printed board thickness
BT-10-1.0	0.9	1.1	1.0
BT-10-1.6	1.5	1.7	1.6

■ Recommended land information

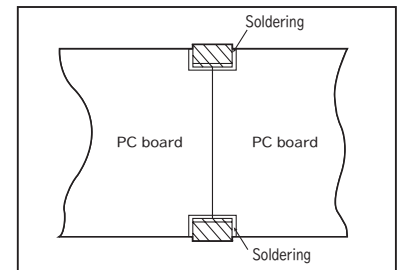



Fit and solder


Terminal for fitting PC boards at right angle

BE series (100 pcs/pack)

- This metal fitting is used for fitting a PC board to a surface mounting board at right angle.
- As there is a space created between the boards, the air flows better.
- Fit and solder to a board on one side to fix. Then, fix to another board with a screw.
- Material: Phosphor bronze
- Finish: Tin plating over nickel base

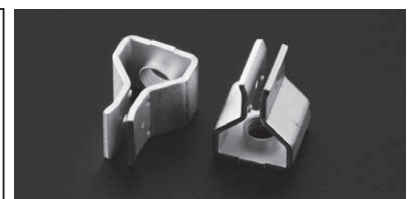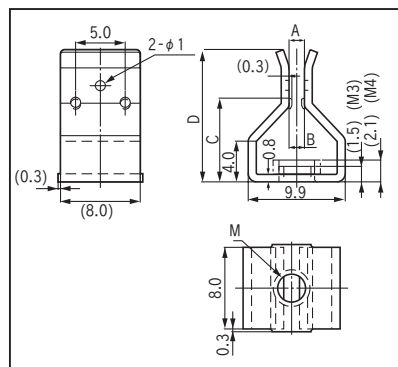

■ Example of usage

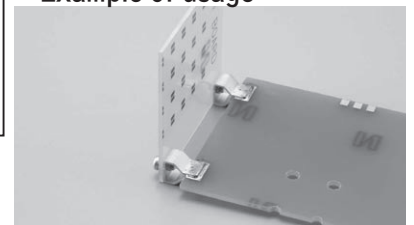

■ Part No.

M3 P = 0.5 M4 P = 0.7

Part No.	A	B	C	D	M	Adaptive printed board thickness
BE-1.6-M3	1.5	1.6	8.2	13.0	M3	1.6
BE-1.6-M4	1.5	1.6	8.2	13.0	M4	1.6
BE-2.0-M3	1.9	2.0	8.3	13.0	M3	2.0
BE-2.0-M4	1.9	2.0	8.3	13.0	M4	2.0
BE-3.2-M3	3.1	3.2	8.6	13.3	M3	3.2
BE-3.2-M4	3.1	3.2	8.6	13.3	M4	3.2

■ Recommended land information

