

Wired relay terminal

3RB series

- Possible to make wired relay at the PC board
- Fix the crimping terminal to the tip of cable and screw.
- Material : Copper
- Finish : Tin plating over nickel base
- Rated current : 30A
- Tightening torque 5kgf-cm (49N-cm) or less




■ Part No.

Part No.	Package
3RB-2-2	Bulk (100pcs/pack)
3RB-2-2-T	Reel (200pcs/reel)
3RB-2-3	Bulk (100pcs/pack)
3RB-2-3-T	Reel (200pcs/reel)

■ Recommended metal mask thickness

150 μm to 200 μm


■ Recommended metal mask





■ Example of usage




■ Dimension

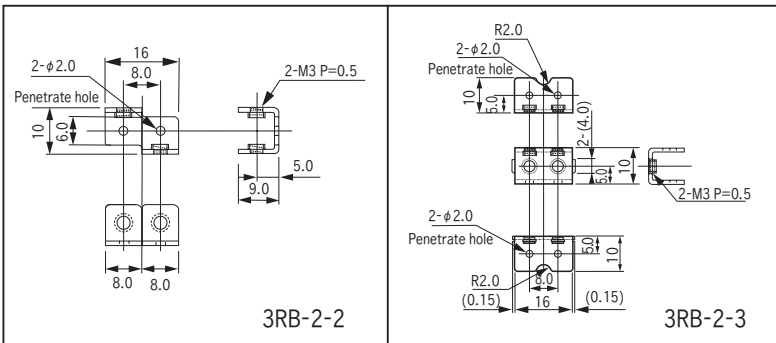

■ Recommended land information



■ 3RB-2-2-T dimension

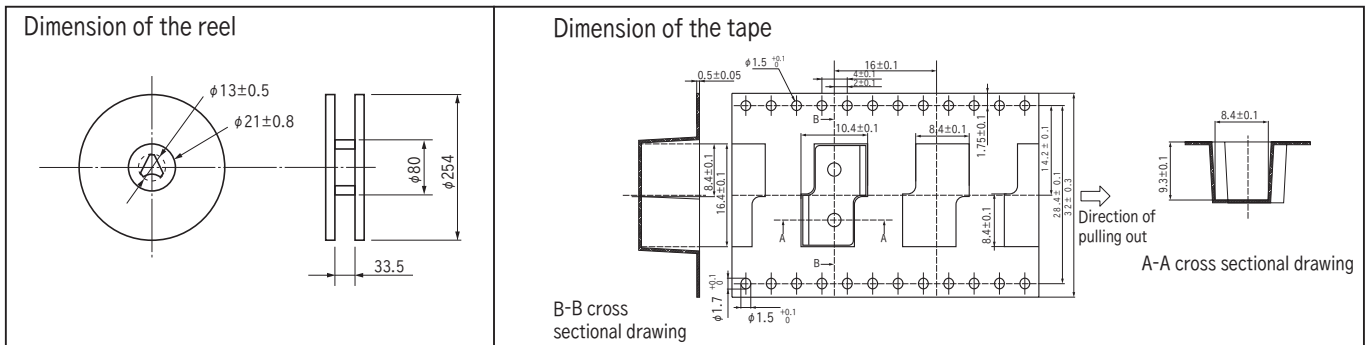

■ 3RB-2-3-T dimension

