
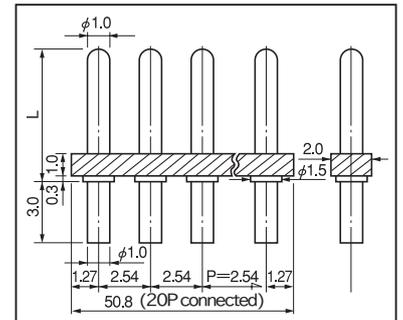


Male pin terminal of connected type

MK series (10pcs/pack)

- This type has 20 pins of ϕ 1.0 connected with a pitch of 2.54mm.
- Please use this product by cutting it to the desired number of poles.
- Please cut it by using a mold cutting nipper (Part No.: MOC-3)
- Material Pin part: Phosphor bronze
Resin part: PCT black (UL94V-0)
- Finish Pin part: Gold plating over nickel base
- Specifications
Rated current: 5A
Rated voltage: 125V AC, DC
Withstand voltage: 1000V AC, DC per minute
Insulation resistance: 500M Ω or over
- Operating temperature range: - 40 to + 125°C
- Printed board fitting hole diameter: ϕ 1.2

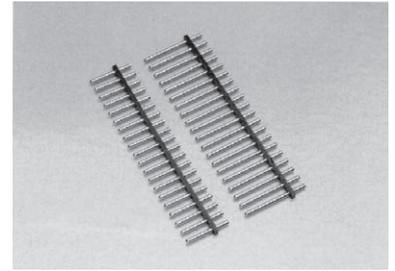



Part No.

| Part No. | L |
|----------|------|
| MK-5.3 | 5.3 |
| MK-8 | 8.0 |
| MK-13 | 13.0 |
| MK-18 | 18.0 |
| MK-23 | 23.0 |
| MK-28 | 28.0 |

Example of usage (When used for two-tiered installation)

- Please use PM-7 on the socket side when using this for mounting PC boards by two-tiered installation.

Example of usage

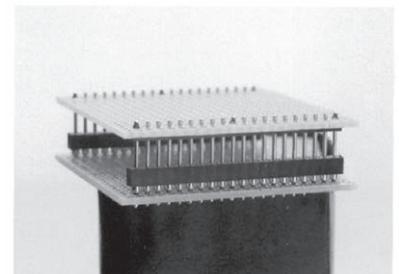

| Part No. | H |
|----------|-----|
| MK-5.3 | 7.3 |
| MK-8 | 9 |
| MK-13 | 14 |
| MK-18 | 19 |
| MK-23 | 24 |
| MK-28 | 29 |

This indicates the distance (H) between the boards when MK series and PM-7 are combined.