


Fixed type for two-tiered installation of SMT boards


RWS series (10pcs/pack)

- This is used for fixing the surface mounting boards by soldering.
- The pins on the both sides are positioning pins.
(We can manufacture the product without positioning pins. Please contact us.)
- We will cut to the desired number of poles and deliver.
- Material Resin part: PPS black (UL94V-0)
Metal part: Phosphor bronze
- Finish: Gold plating over nickel base
- Current capacity: 2A
- Insulation resistance: 500M Ω or over
- Withstand voltage: 700V AC, DC per minute (RWS-1 type)
1000V AC, DC per minute (RWS-3 type)
- Operating temperature range: - 40 to + 125°C

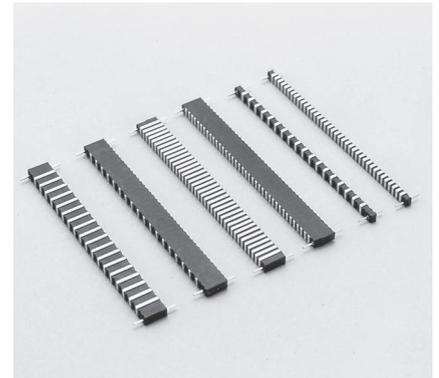


Part No.

Part No.	H	P	Maximum number of pins connected
RWS-1-1	1.0	1.27	40
RWS-1-1.5	1.5	1.27	40
RWS-1-2	2.0	1.27	40
RWS-1-2.5	2.5	1.27	40
RWS-1-3	3.0	1.27	40
RWS-1-3.5	3.5	1.27	40
RWS-1-4	4.0	1.27	40
RWS-1-4.5	4.5	1.27	40
RWS-1-5	5.0	1.27	40
RWS-3-1	1.0	2.54	20
RWS-3-1.5	1.5	2.54	20
RWS-3-2	2.0	2.54	20
RWS-3-2.5	2.5	2.54	20
RWS-3-3	3.0	2.54	20
RWS-3-3.5	3.5	2.54	20
RWS-3-4	4.0	2.54	20
RWS-3-4.5	4.5	2.54	20
RWS-3-5	5.0	2.54	20

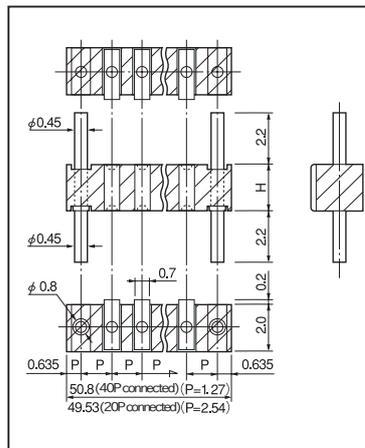

Example of usage

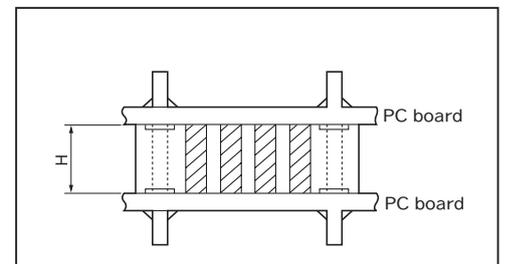

How to order


RWS-1-1-10P

↑ Please fill in the desired number of poles.
(Please fill in the number of poles including the positioning pin.)
(With 8 pins as the surface mounting pin and 2 pins as the positioning pin)

* We can manufacture the product without positioning pins. Please contact us.

Instructions for use

When using 2 pieces or more, please place the metal part sides in the same direction.

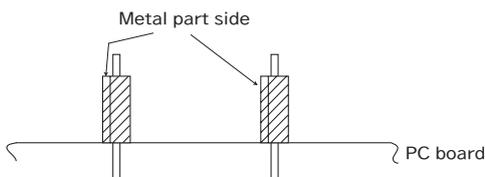

Instructions for mounting

In the case that a warpage occurs on the resin part during reflow because many pins are connected for use, apply an adhesive to several places.

Recommended land information

