
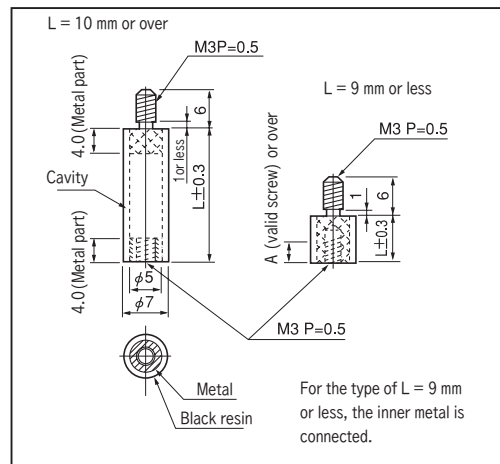
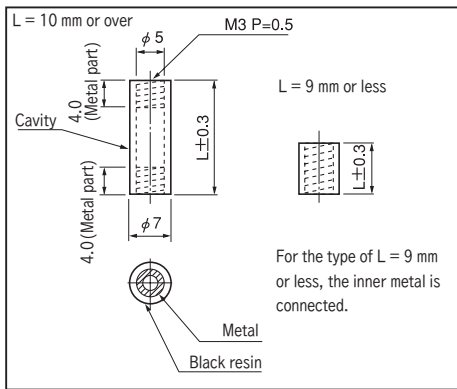


Spacer of metal resin type for printed board

AP, AQ series (100pcs/pack)

- The strength of this spacer is increased by filling metal in the resin.
- For the type of 10 mm or over, the upper part and the lower part are electrically insulated.
- For the type of 9 mm or less, they are electrically connected.
- Material Resin part: PBT black (UL94V-0)
Metal part: Brass
- Finish: Nickel plating
- Operating temperature range: - 40 to + 125°C

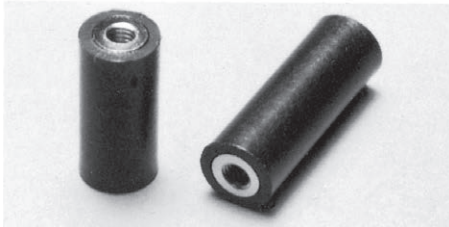

■ AP type (for M3)

Part No.	L
AP-4	4
AP-5	5
AP-6	6
AP-7	7
AP-8	8
AP-9	9
AP-10	10
AP-11	11
AP-12	12
AP-13	13
AP-14	14
AP-15	15
AP-16	16
AP-17	17
AP-18	18
AP-19	19
AP-20	20
AP-25	25
AP-30	30
AP-35	35
AP-40	40
AP-45	45
AP-50	50

■ AQ type (for M3)

Part No.	L	A
AQ-4	4	2.5
AQ-5	5	3
AQ-6	6	4
AQ-7	7	4
AQ-8	8	4
AQ-9	9	4

AQ-10	10
AQ-11	11
AQ-12	12
AQ-13	13
AQ-14	14
AQ-15	15
AQ-16	16
AQ-17	17
AQ-18	18
AQ-19	19
AQ-20	20
AQ-25	25
AQ-30	30
AQ-35	35
AQ-40	40
AQ-45	45
AQ-50	50