




**For two-tiered installation of fixed type product**

**DP series (1000pcs/pack)**


- This is used for mounting PC boards by two-tiered installation.
- Both the main board and the slave board are fixed by soldering.
- Material: Brass
- Finish:
  - DP-1, DP-2, DP-4: Gold plating over nickel base
  - DP-5, DP-10, DP-15, DP-20: Tin plating over nickel base
- Rated current: DP-1, DP-2, DP-4: 5A  
 DP-5, DP-10, DP-15, DP-20: 20A



Part No.	L	Distance H between the main board and the slave board	Printed board fitting hole diameter	Fitting method	Press-fitting tool edge chip
DP-1	6.5	7.5	φ 0.8	—	—
DP-2	11.0	12.0	φ 0.8	—	—
DP-4	3.0	4.0	φ 0.8	—	—
DP-5	5.0	5.0	φ 1.6	One-side press-fitting method	P-5
DP-10	10.0	10.0	φ 1.6		
DP-15	15.0	15.0	φ 1.6		
DP-20	20.0	20.0	φ 1.6		



DP-1  
DP-2  
DP-4




DP-5  
DP-10  
DP-15  
DP-20

\* The press-fitting tool edge chip, P series, is not operable without the main unit, PCX-1

**For two-tiered installation of super-small boards**


**DS series (1000pcs/pack)**

- This is used for mounting small boards by two-tiered installation.
- Both the main board and the slave board are fixed by soldering.
- Material: Phosphor bronze
- Finish: Gold plating over nickel base
- Rated current: 2A
- Printed board fitting hole diameter: φ 0.5

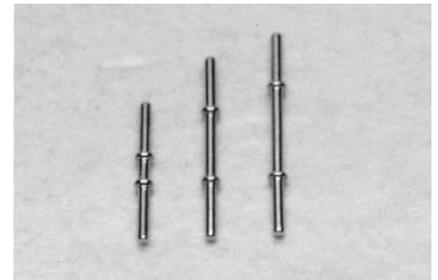

Part No.	L
DS-1.5	1.5
DS-2	2
DS-2.5	2.5
DS-3	3
DS-3.5	3.5
DS-4	4
DS-4.5	4.5
DS-6	6

■ Dimension

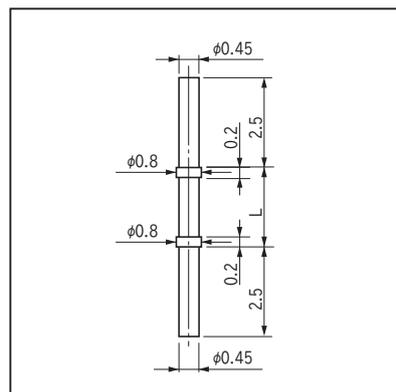

■ Example of usage

