



Vertical type connection terminal for surface mounting

ACS series (10pcs/pack)

- This terminal is used for fitting a surface mounting board vertically to a surface mounting board.
- The pins on the both sides are positioning pins.
(As the positioning pins are electrically coupled, they can carry out circuit joining in the same manner as SMT pins.)
- Pitch: 2.54 mm, 1.27 mm
- Material Resin part: PPS black (UL94V-0)
Pin part: Phosphor bronze
- Finish: Gold plating over nickel base
- Rated current: 3A (ACS-1-1)
5A (ACS-3-1)
- Insulation resistance: 500M Ω or over
- Withstand voltage: 500V AC, DC per minute (ACS-1-1)
1000V AC, DC per minute (ACS-3-1)
- Operating temperature range: - 40 to + 125°C
- Thickness of the insertion side PC board that can be fit: 1.6 mm or less



■ Example of usage

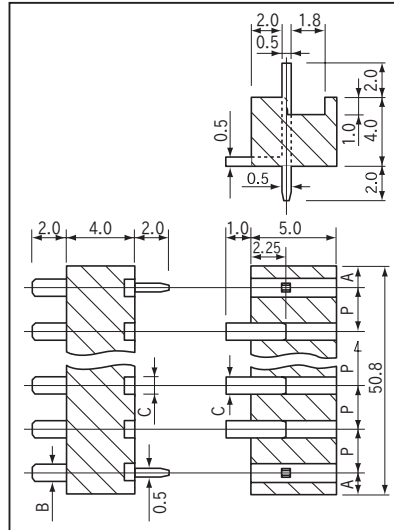

■ Part No.

Part No.	A	B	C	P	Maximum number of pins connected
ACS-1-1	0.635	0.5	0.5	1.27	40
ACS-3-1	1.27	1.0	1.0	2.54	20

■ How to order

ACS-1-1-10P

↑ Please fill in the desired number of poles.
(Please fill in the number of poles including the positioning pin.)
(With 8P as the pins for face mounting and 2P as the positioning pins)

* We can manufacture the product without positioning pins.
(Please contact us.)


■ Instructions for mounting

In the case that a warpage occurs on the resin part during reflow because many pins are connected for use, apply an adhesive to several positions.

■ Instructions for use

When fitting a large board or heavy board, please use the fitting bracket AX series on the both sides.


■ Recommended land information

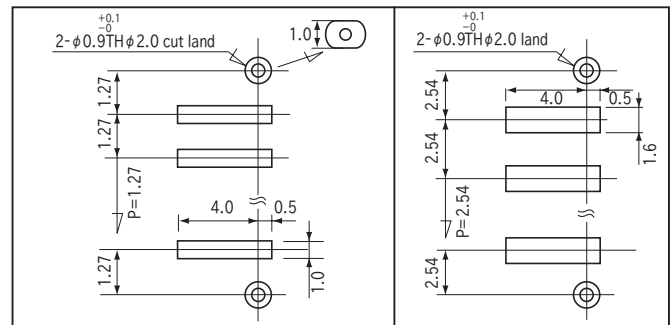

ACS - 1 - 1

ACS - 3 - 1

■ Recommended land information (insertion side)
(thickness of the insertion side PC board: 1.6 mm or less)

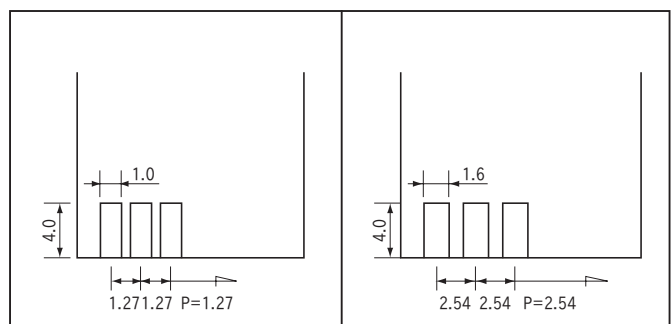

When using ACS-1-1

When using ACS-3-1