



Hybrid connection terminal for surface mounting

HZR series (10pcs/pack)

- By inserting the upper part of this terminal in a through hole and soldering it, a hybrid IC for surface mounting, etc. can be easily made.
- Material
 - Pin part: Phosphor bronze
 - Resin part: PCT black (UL94V-0)
- Finish G:Gold plating over nickel base
S:Tin plating over nickel base
- Rated current: 2A
- Insulation resistance: 500M Ω or over
- Withstand voltage: HZR-1: 700V AC, DC per minute
HZR-3: 1000V AC, DC per minute
- Printed board fitting hole diameter: φ 0.7

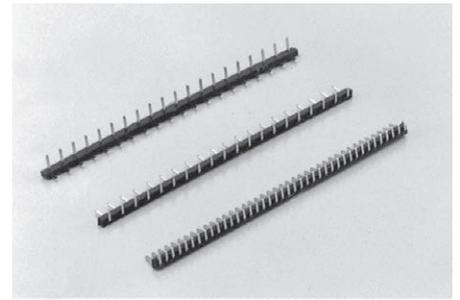

■ Example of usage

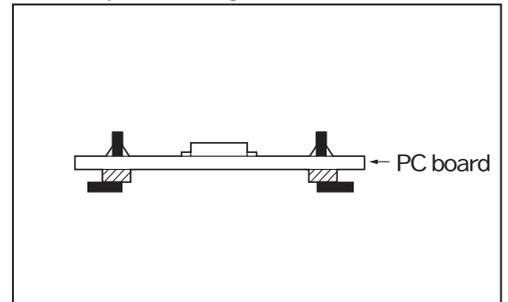

■ Part No.



Part No.	P	Maximum number of pins connected	Plating
HZR-1-G	1.27	40	Gold
HZR-1-S	1.27	40	Tin
HZR-3-G	2.54	20	Gold
HZR-3-S	2.54	20	Tin

■ How to order

HZR-1-G-10P

↑
Please fill in the desired number of poles.
(If the number is not specified, we will deliver by the maximum number of connections.)

■ Recommended land information (TH side)

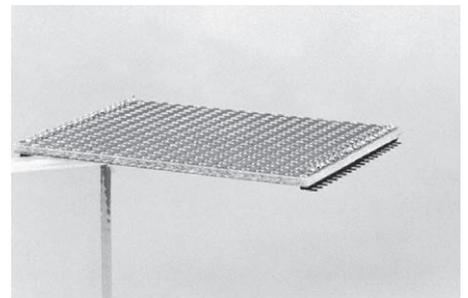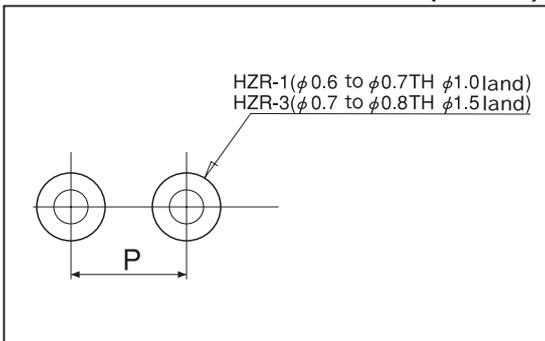

■ Recommended land information (SMT side)

