

Jumper socket (for the pitch of 2.54mm)

Part No.: **JS-1** (100pcs/pack)


- By combining with WL-1, WLW-1, WLA-1-2, WLA-2-2, switching function is available.
- Material Contact part: Phosphor bronze
Resin part: PBT (UL94V-0), color: BLACK, RED, YELLOW, GREEN, BLUE, WHITE
- Finish Contact part: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 250V AC, DC
- Contact resistance: 20m Ω or less
- Adaptive male pin diameter: □0.64, P = 2.54
- Insertion / Removal forces: 70g or over
- Operating temperature range: - 40 to + 125°C

■ **How to order:**

JS-1 RED

↑ Please fill in the color.
(BLACK, RED, YELLOW, GREEN, BLUE, WHITE)
If the color is not specified, we will deliver the black one

■ The connected type is JSW-1

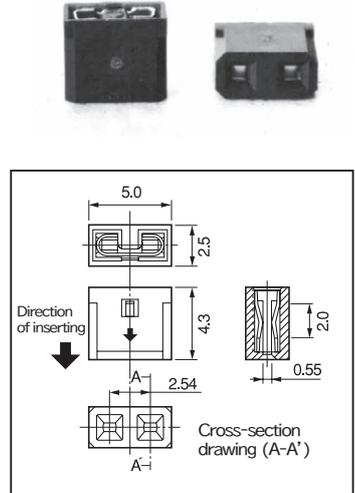



Jumper socket for wrapping (for the pitch 5.08 mm)

Part No.: **JS-3** (100pcs/pack)


- By combining with the □0.64 wrapping pin, switching function is available
- This product applies to the pitch 5.08 mm
- The mating pin for JS-3 is WL-1-2P: P = 5.08, or WL-8-2P: P = 5.08
Please contact us, if you have any inquiry
- Material Contact part: Phosphor bronze
Resin part: PBT black (UL94V-0)
- Finish Contact part: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 250V AC, DC
- Contact resistance: 20m Ω or less
- Adaptive male pin diameter: □0.64, P = 5.08
- Insertion / Removal forces: 70g or over
- Operating temperature range: - 40 to + 125°C

■ **Part No.**

Part No.	Pitch of the male pin	Adaptive male pin diameter
JS-3	5.08	□0.64

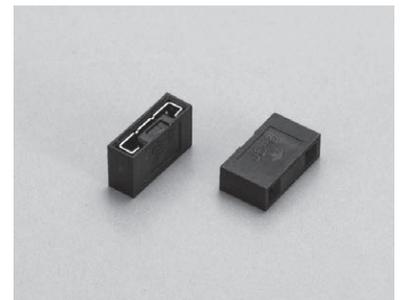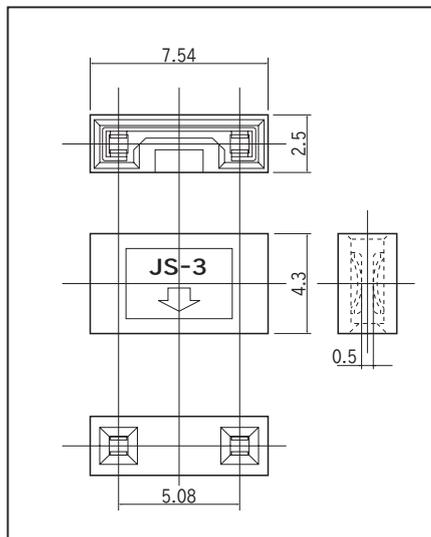

■ **Dimension**

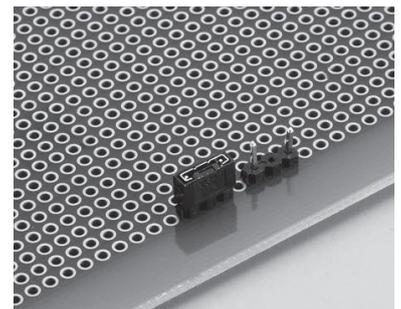

Combination of JS-3 and WL-1-2P: P = 5.08