




LED spacer (two-tiered installation type)

Part No.: **LW-1** (100pcs/pack)


- This is used for an LED with the head diameter of ϕ 3 or ϕ 5.
- This is used for fitting LEDs by two-tiered installation.
- Please insert the LEDs to the spacer and bend the legs at right angle.
- Material: PBT resin (UL94V-0)
- Color: Black
- Operating temperature range: - 40 to + 125°C



■ Part No.: LW-1

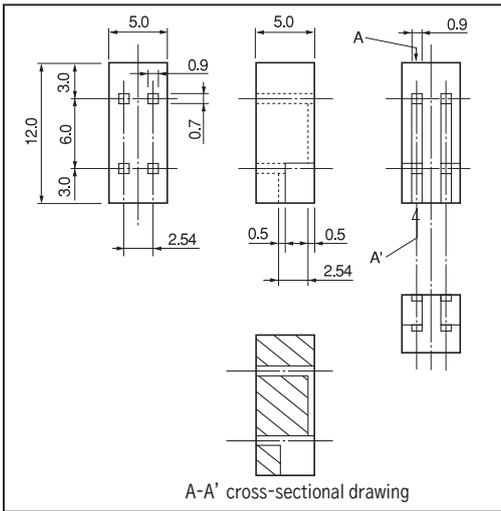



■ Example of usage

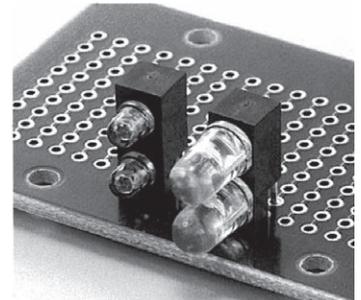

LED spacer (two-tiered installation type) (three-legged type)

Part No.: **3LW-1** (100pcs/pack)

- This is used for fitting LEDs of dual-color emission type (three-legged type) by two-tiered installation.
- This is used for an LED with the head diameter of ϕ 3 or ϕ 5.
- LED leg pitch: 2.5 mm, 2.54 mm
- Material: PPS resin (UL94V-0)
- Color: Black
- Reflow: Can be used.
- Operating temperature range: - 40 to + 125°C

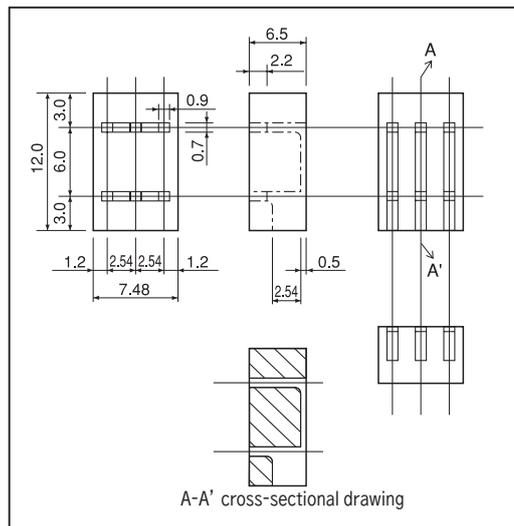

■ Example of usage

