



Parallel type power supply socket surface mounting

HH-51, HHO-51

- This socket can connect the boards in parallel.
- This can supply power.
- Material
 - HH-51 : Body: Brass
Contact: Beryllium copper
 - HHO-51: Brass
- Finish: Gold plating over nickel base
- Rated current: 20A
- Contact resistance: 10m Ω or less
- Insertion / removal forces: 150g or over
- Insertion / removal durability: 100 cycles
- Adaptive male pin diameter: φ 1.7 to φ 2.1
- Operating temperature range: - 40 to + 125°C

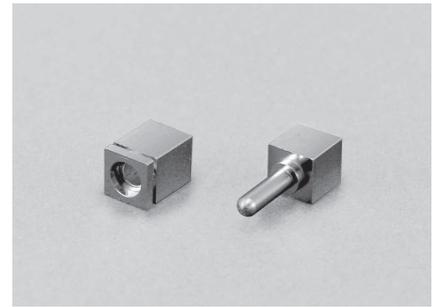


■ Example of usage

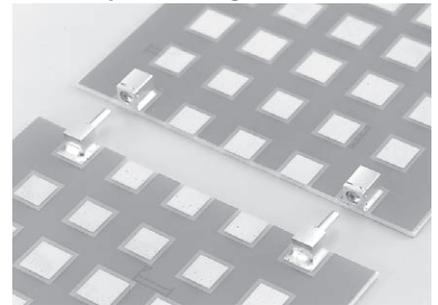


■ Part No.

Part No.	Package
HH-51	Bulk (100pcs/pack)
HH-51-T	Reel (300pcs/reel)
HHO-51	Bulk (100pcs/pack)
HHO-51-T	Reel (200pcs/reel)


■ Recommended land information




HH-51




HHO-51

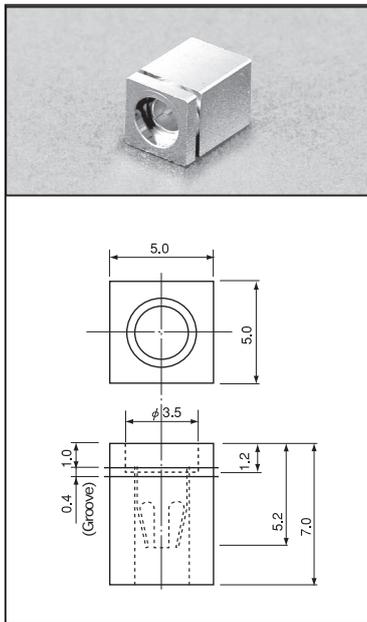

Part No.: HH-51

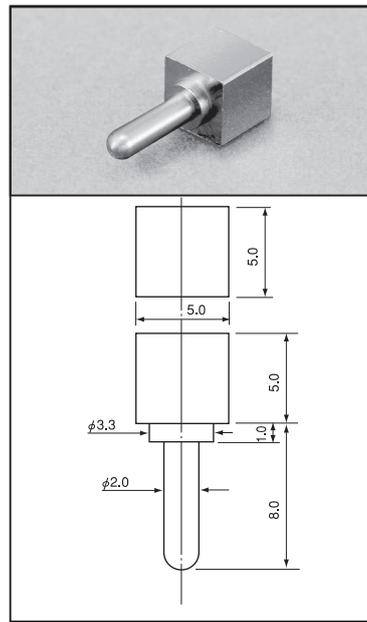


Part No.: HHO-51

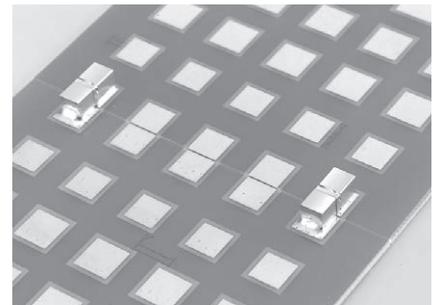

■ Instructions for use

The grooved side of HH-51 is the direction for inserting the pin.

■ Dimension of the reel (HHO-51-T)

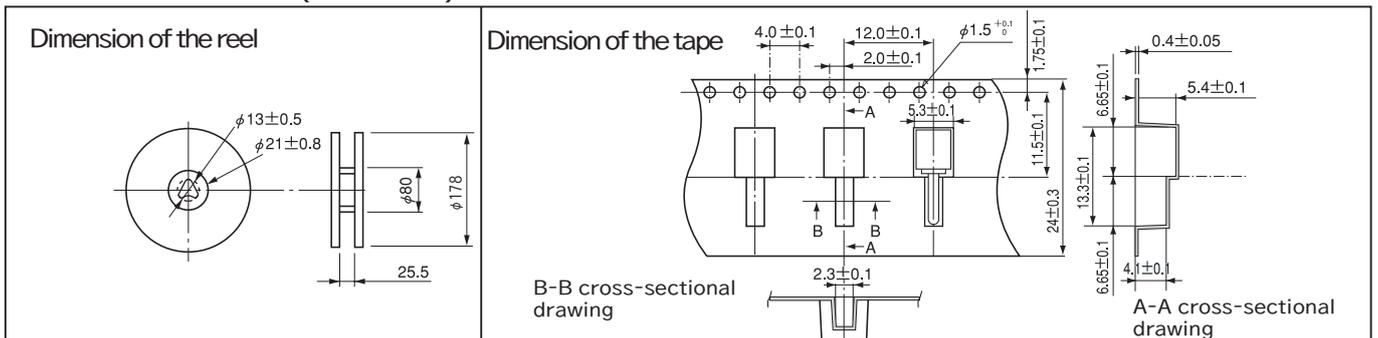

※ The dimension of the reel for HH-51-T is the same as that for HH-5.