


Adjustment part terminal for surface mounting

HMR series (10pcs/pack)


- This is used for fitting a lead type resistor, capacitor, etc. on a surface mounting board.
- Material Resin part: PCT resin black (UL94V-0)
Pin part: Phosphor bronze
- Finish: Gold plating over nickel base

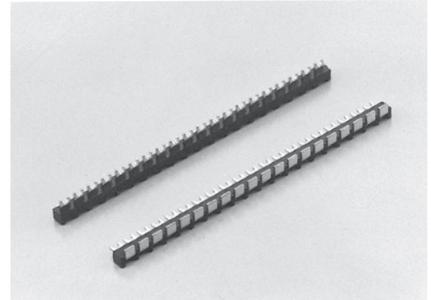

■ Part No.

Part No.	H
HMR-4	4
HMR-6	6
HMR-8	8
HMR-10	10

■ Recommended land information

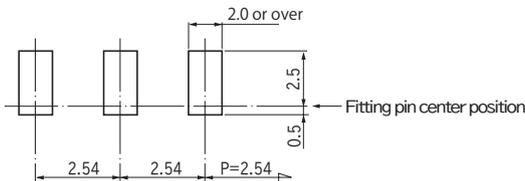

■ How to order


HMR-4-10P

Please fill in the desired number of poles.
(If the number is not specified, we will deliver the part of the maximum number of poles, 20P.)


■ Instructions for mounting

In the case that a warpage occurs on the resin part during reflow because many pins are connected for use, apply an adhesive to several places.

■ Example of usage

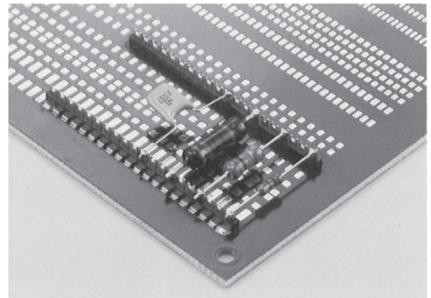

■ Dimension

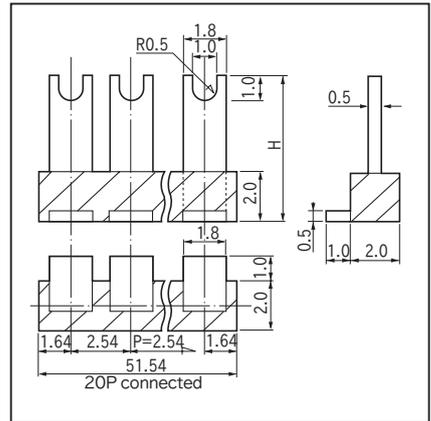


For lead part fitting

QH series (100pcs/pack)

- This is used for fitting a lead part to a surface mounting board.
- After soldering this product to the surface mounting board, please insert the lead part in the hole and solder it.
- Material: Brass
- Finish: Tin plating over nickel base

Part No.	A	B	Recommended land information
QH-25-08	0.8	2.0	φ 3
QH-25-11	1.1	2.0	φ 3
QH-25-16	1.6	2.5	φ 3.5

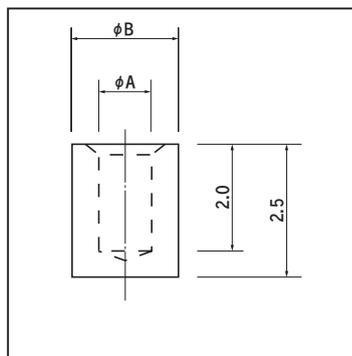

■ Example of usage

